


DS-7104/08HGHI-SH

Mini Turbo HD DVR


TURBO HD

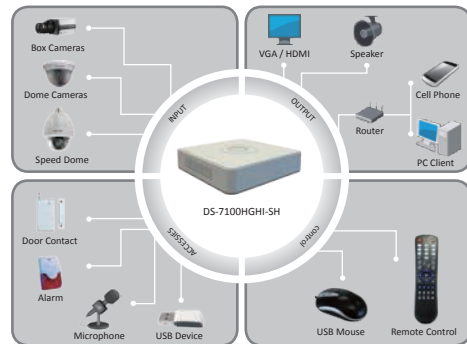

Key features

- H.264 & Dual-stream video compression
- Support HDTV/analog camera hybrid
- Support both HD-TVI and analog cameras with adaptive access
- Full channel @ 720P resolution real-time and 1080P no-real-time recording
- HDMI and VGA output at up to 1920x1080P resolution
- Long transmission distance over coax cable

Rear Panel of DS-7100HGHI-SH

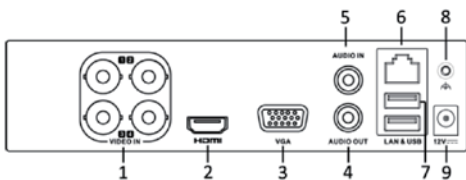

1. VIDEO IN
2. HDMI Interface
3. VGA Interface
4. AUDIO OUT, RCA Connector
5. AUDIO IN, RCA Connector
6. LAN Network Interface
7. USB Ports
8. GND
9. 12VDC Power Input

Available models

DS-7104HGHI-SH

DS-7108HGHI-SH

	DS-7104HGHI-SH	DS-7108HGHI-SH
Video/Audio input		
Video compression	H.264	
Analog and HD-TVI video input	4-ch	8-ch
	BNC interface (1.0Vp-p, 75 Ω)	
Supported camera types	720P25, 720P30, 720P50, 720P60, 1080P25, 1080P30, CVBS	
Audio compression	G.711u	
Audio input / Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
Video/Audio output		
HDMI / VGA output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
Encoding resolution	Main stream: 1080P(non-real-time) / 720P / VGA / WD1 / 4CIF / CIF Sub-stream: WD1(non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA	
Frame rate	Main stream: 1/16 fps ~ Real time frame rate Sub-stream: 1/16 fps ~ Real time frame rate	
Video bitrate	32 Kbps-6 Mbps	
Audio output	1-ch, RCA (Linear, 1KΩ)	
Audio bitrate	64 Kbps	
Dual-stream	Support	
Stream type	Video, Video & Audio	
Synchronous playback	4-ch	8-ch
Playback resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / VGA / CIF	
Network		
Remote connections	128	
Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS	
Hard disk		
SATA	1 SATA interface	
Capacity	Up to 4 TB capacity for each disk	
External interface		
Network interface	1; 10M / 100M self-adaptive Ethernet interface	
USB port	2×USB2.0	
General		
Power supply	12V DC	
Consumption (without hard disks)	≤ 15W	
Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)	
Working humidity	10% ~ 90%	
Dimensions (W × D × H)	200 × 200 × 45mm (7.9 × 7.9 × 1.8 inch)	280 × 210 × 45mm (11 × 8.3 × 1.8 inch)
Weight (without hard disks)	≤ 0.8 kg / 1.8lb	≤ 0.8 kg / 1.8lb